





INSTALLATION INSTRUCTIONS FOR FIXTURE: CHA-WC8-350/600 SCONCE

WARNING: RISK OF FIRE AND ELECTRIC SHOCK! THIS FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY! MAKE SURE ELECTRICAL CURRENT IS DISCONNECTED BEFORE MAKING ELECTRICAL SPLICES.

DISCONNECT POWER

1. UNWRAP ALL FIXTURE COMPONENTS INCLUDING SMALL PARTS BAGS ENCLOSED.
2. PLACE DRIVER IN JUNCTION BOX (4-0 OR 4SQ W/ BACK OF THE DRIVER FACING OUT) AFTER MAKING SPLICES TO BUILDING POWER AND DIMMING WIRES. DRIVER CAN FUNCTION ON EITHER TRIAC/ELV OR 0-10V DIMMING SYSTEMS. SEE WIRE DIAGRAM BELOW.
3. PLACE WALL BRACKET OVER DRIVER IN JUNCTION BOX AFTER FEEDING WIRE TO CONNECT TO LED BOARD THROUGH CENTER AND FASTEN TO BOX. SPLICE GROUND TO BUILDING WIRES.
4. MAKE SPLICES FROM DRIVER TO LED BOARD.
5. PLACE BACK PLATE OVER STRAP AND SECURE WITH TWO 8-32 NUTS (PROVIDED) ENSURE PINS ARE HORIZONTAL AND LEVEL.
6. ALIGN DIFFUSER LENS PUSH PIN RECEIVERS WITH THE PUSH PINS ON THE BACKPLATE. PUSH DIFFUSER ONTO THE BACKPLATE. RECONNECT POWER.

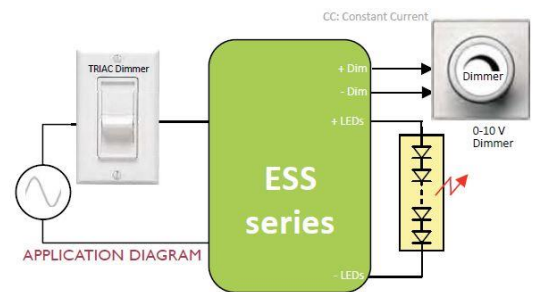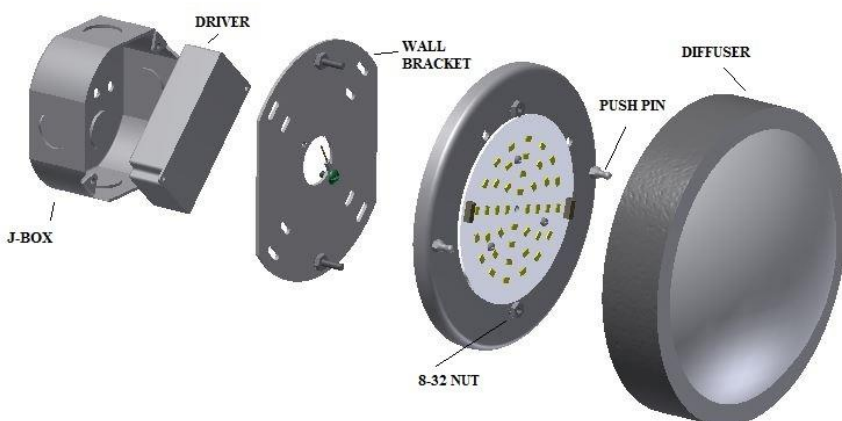

FEATURES

- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0-10 V dimmers
- ESSxxxW: TRIAC and ELV dimming only at 120 Vac.
- ESSxxxE: ELV dimming only at 230 Vac.
- Linear 0-10V dimming transfer function: 10V=100%, 1V=10%, 0.1V=1%