
chameleon C

CATALOG #

## TRAPEZOID ACOUSTIC SILENCIO FAN PENDANT

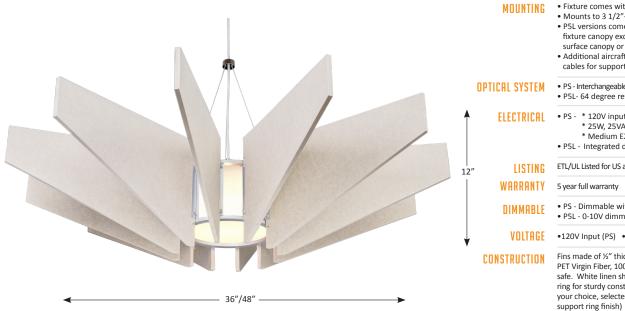

TING	<ul> <li>Fixture comes with 10ft cord</li> <li>Mounts to 3 1/2"-4" J Box</li> <li>P5L versions comes with LED driver mounted in fixture canopy except L15 and 18 which requires surface canopy or remote enclosure chosen below</li> <li>Additional aircraft cable system with 120" adjustable cables for support</li> </ul>									
STEM	<ul> <li>PS - Interchangeable screw-in LED lamps (lamp not included)</li> <li>P5L- 64 degree reflector</li> </ul>									
ICAL	<ul> <li>PS - * 120V input</li> <li>* 25W, 25VA (max 25W lamp LED)</li> <li>* Medium E26 base socket</li> <li>P5L - Integrated downlight LED</li> </ul>									
TING	ETL/UL Listed for US and Canada. Suitable for damp location									
ANTY	5 year full warranty									
ABLE	<ul> <li>PS - Dimmable with compatible lamp</li> <li>P5L - 0-10V dimming to 1%</li> </ul>									
TAGE	•120V Input (PS) •120~277V (P5L)									
TION	Fins made of ½" thick 65% PET Recycled fiber and 35% PET Virgin Fiber, 100% recyclable, environmentally safe. White linen shade/diffuser, silver metal support ring for sturdy construction, canopy and cord color of your choice, selected below (contact factory for custom									

## **BUILD YOUR PRODUCT**

Grayed areas are codes for creating your lighting catalog # EXAMPLE CATALOG # SCF-12-TRAP-36-S-PT-P5L3-30-8

SHADE Style	SHAPE/SIZE *SEE DRAWING ABOVE	CANOPY/CORE FINISH * Silver Support Ring				FIN FINISH		ELECTRICAL		COLOR TEMP * PSL LED ONLY		CRI * PSL LED ONLY	
□ SCF-12	TRAP-36		Silver	D PT	Pewter Gray	D PS	25 watt medium base socket *lamp by others	□ 30	3000K	□ 8	80		
	TRAP-48	□B	Black	□ SL	Slate Gray	□ P5L3	3000lm 0-10v Dimming	□ 35	3000K	□ 9	90		
		□w	White*	□ WH	White	□ P5L6	6000lm 0-10v Dimming	□ 40	4000K				
			*available for PS only	🗆 BU	Blue	□ P5L8	8000lm 0-10v Dimming						
				BK	Black	□ P5L12	12000lm 0-10v Dimming						
				□ TN	Tan	□ P5L15	15000lm 0-10v Dimming						
				□C	Custom	□ P5L18	18000lm 0-10v Dimming						
*consult factory													

