


ACOUSTIC SILENCIO INDUSTRIAL PENDANT

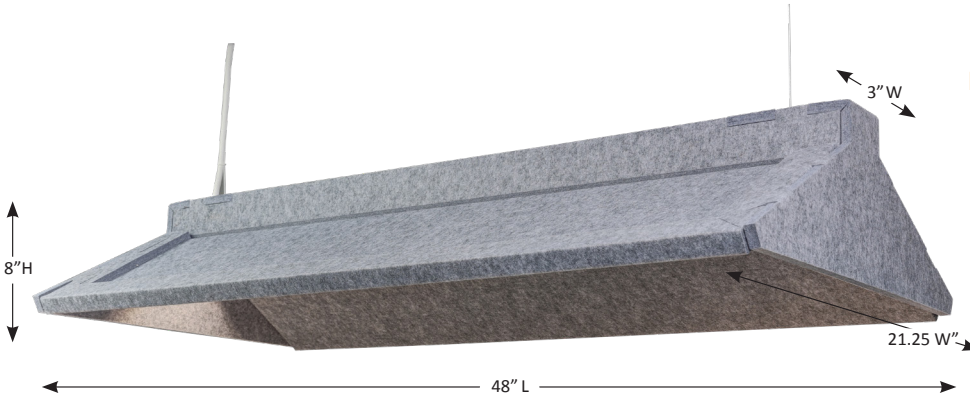

LED MODULE

- LED
- 3000K, 3500K, 4000K
- 80 & 90 CRI
- 4FT- 5,800 delivered lumens at approx. 45 watts

BEAM SPREADS 50 Degree, 80 Degree beam spreads

CONSTRUCTION

- 20 GA Steel post painted with integral driver light source
- Shade manufactured with 65% PET-Recycled Fiber and 35% PET Virgin Fiber, 100% recyclable, environmentally safe
- Low glare louvered optic

ELECTRICAL 120-277V input power supply.

LISTING UL for US and Canada. Suitable for damp location DLC

WARRANTY 5 Year Full Warranty

MOUNTING Suspended

ADDITIONAL FEATURES

- 90% efficacy, up to 160+ LPW
- Extremely even vertical illumination: less than 3:1 Ratio
- Easy installation

DIMMING 0-10V Dimming to 1%

BUILD YOUR PRODUCT

Grayed areas are codes for creating your lighting catalog #
 EXAMPLE CATALOG # SCIND-4-PT/LPAR-4-30-8-50-W/SCK-LPAR-W/EM-ITA

SHADE STYLE	SIZE	ACOUSTIC FINISH
<input type="checkbox"/> SCIND	<input type="checkbox"/> 4 4FT	<input type="checkbox"/> PT Pewter Gray <input type="checkbox"/> SL Slate Gray <input type="checkbox"/> WH White <input type="checkbox"/> BU Blue <input type="checkbox"/> BK Black <input type="checkbox"/> TN Tan <input type="checkbox"/> C Custom *consult factory

ELECTRICAL	COLOR TEMP.	CRI	BEAM SPREAD	INTERIOR OPTIC FINISH
<input type="checkbox"/> LPAR-4	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 80 CRI <input type="checkbox"/> 9 90 CRI	<input type="checkbox"/> 50 50° <input type="checkbox"/> 80 80°	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> S Silver

MOUNTING OPTIONS	FINISH
<input type="checkbox"/> SCK-LPAR Stem Kit (24", 45 Degree swivel)	<input type="checkbox"/> S
<input type="checkbox"/> CCK-LPAR-F/NF Cable Kit (F=FEED NF=NON-FEED) 120" Adjustable	<input type="checkbox"/> B
	<input type="checkbox"/> W

OPTIONAL REMOTE EMERGENCY BACKUP (FIELD INSTALLED)	
<input type="checkbox"/> EM-ITA	Yes
<input type="checkbox"/> (blank)	No

*** Specifications subject to change without notice.