


# ACOUSTIC SILENCIO JAM BAR - LINEAR PENDANT

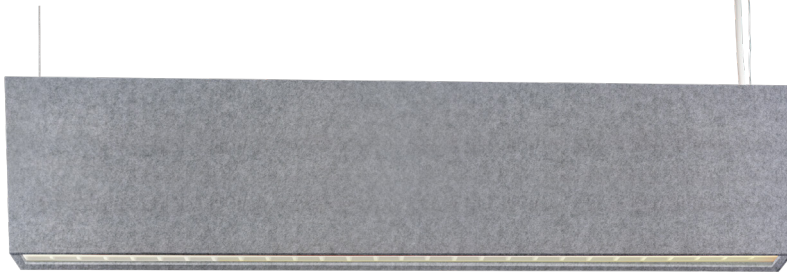

### LED MODULE

- LED
- 3000K, 3500K, 4000K
- 80 & 90 CRI
- 4FT - 5,000 delivered lumens at approx. 42 watts
- 8FT - 10,000 delivered lumens at approx. 84 watts

### BEAM SPREADS

50 Degree and 80 Degree Beamspreads

### CONSTRUCTION

- 20 GA Steel post painted with integral driver light source
- Shade manufactured with 65% PET-Recycled Fiber and 35% PET Virgin Fiber, 100% recyclable, environmentally safe
- Low glare louvered optic

### ELECTRICAL

120-277V input power supply.

### LISTING

UL for US and Canada.  
Suitable for damp location.  
DLC

### WARRANTY

5 Year Full Warranty

### MOUNTING

- Suspended
- CCK-HAB Cable kit for unlit baffle

### SIZE

- 4FT | 8FT
- Consult factory for custom runs/lengths

### ADDITIONAL OPTIONS

- Optional up-light 240 lumens per foot
- System Assembly

### ADDITIONAL FEATURES

- 90% efficacy 130+ LPW
- Extremely even vertical illumination: less than 3:1 Ratio
- Easy installation

### DIMMING

0-10V Dimming to 1%

## BUILD YOUR PRODUCT

Grayed areas are codes for creating your lighting catalog #  
EXAMPLE CATALOG # **AJB-4-PT/LPAR-4-30-8-50-W**

SHADE STYLE	SIZE	ACOUSTIC FINISH
<input type="checkbox"/> AJB	<input type="checkbox"/> 4 4FT <input type="checkbox"/> 8 8FT	<input type="checkbox"/> PT Pewter Grey <input type="checkbox"/> SL Slate Grey


ELECTRICAL	SIZE (NOMINAL)	COLOR TEMP.	CRI	BEAM SPREAD	INTERIOR OPTIC FINISH
<input type="checkbox"/> LPAR Lighted Shade <input type="checkbox"/> (blank) Unlit	<input type="checkbox"/> 4 4FT <input type="checkbox"/> 8 8FT	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 80 CRI <input type="checkbox"/> 9 90 CRI	<input type="checkbox"/> 50 50° <input type="checkbox"/> 80 80°	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> S Silver

UPLIGHT OPTION*	SIZE	COLOR TEMP.	CRI
<input type="checkbox"/> UPL-LPAR yes <input type="checkbox"/> (blank) no <small>*240lm/ft field installLED</small>	<input type="checkbox"/> 4 <input type="checkbox"/> 8	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 9 90

MOUNTING OPTIONS	FINISH
<input type="checkbox"/> SCK-LPAR Stem Kit (24", 45 Degree swivel)	<input type="checkbox"/> S
<input type="checkbox"/> CCK-LPAR-F/NF Cable Kit (F=FEED NF=NON-FEED) 120" Adjustable	<input type="checkbox"/> B <input type="checkbox"/> W

OPTIONAL REMOTE EMERGENCY BACKUP (FIELD INSTALLED)
<input type="checkbox"/> EM-ITA Yes
<input type="checkbox"/> (blank) No

**ACOUSTIC SILENCIO JAM BAR - LINEAR PENDANT**

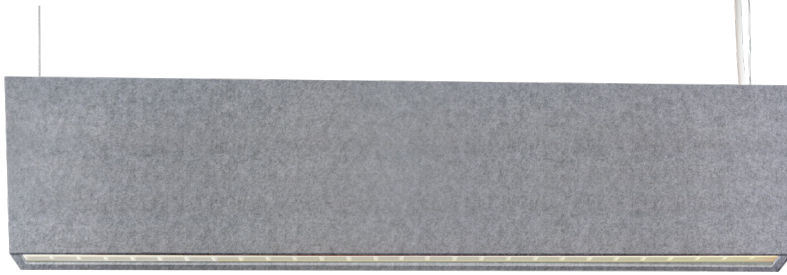

**LED MODULE**

- LED
- 3000K, 3500K, 4000K
- 80 & 90 CRI
- 4FT - 5,000 delivered lumens at approx. 42 watts
- 8FT - 10,000 delivered lumens at approx. 84 watts

**BEAM SPREADS**

50 Degree and 80 Degree Beamspreads

**CONSTRUCTION**

- 20 GA Steel post painted with integral driver light source
- Shade manufactured with 65% PET-Recycled Fiber and 35% PET Virgin Fiber, 100% recyclable, environmentally safe
- Low glare louvered optic

**ELECTRICAL**

120-277V input power supply.

**LISTING**

UL for US and Canada.  
Suitable for damp location.  
DLC

**WARRANTY**

5 Year Full Warranty

**MOUNTING**

Suspended

**SIZE**

- 4FT | 8FT
- Consult factory for custom runs/lengths

**ADDITIONAL OPTIONS**

- Optional up-light 240 lumens per foot
- System Assembly


**ADDITIONAL FEATURES**

- 90% efficacy 130+ LPW
- Extremely even vertical illumination: less than 3:1 Ratio
- Easy installation

**DIMMING**


0-10V Dimming to 1%

**ADDITIONAL SHADE DIMENSIONS**

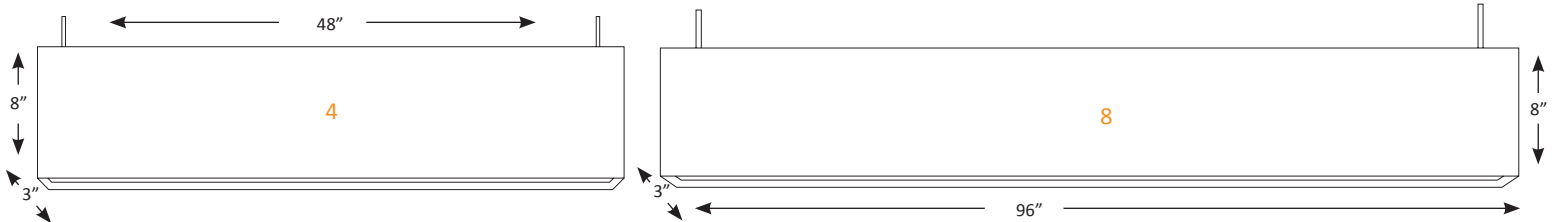


**LINE DRAWINGS OF LIGHT SOURCE**


**4 FOOT FIXTURE**




LPAR-4



**8 FOOT FIXTURE**



LPAR-8



\*\*\* Specifications subject to change without notice.