



DOUBLE DRUM - SURFACE OR SUSPENDED (CDD)

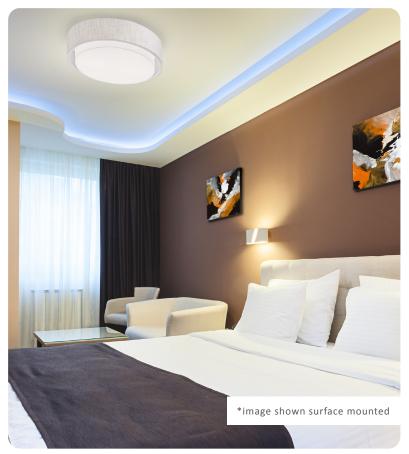

DIFFUSER:

- Outer drum fabric finish features 100% polyester fabric fused to acrylic. Washable with mild soap and water
- Inner drum and diffuser created using UV stabilized, high transmission white acrylic



LIGHT ENGINE SPECIFICATIONS:

- Injection molded optics provide uniform luminous appearance
- >54,000 Hr. L70 life
- Integral driver, 120V, 60Hz, standard
- Dimmable to 10% via Triac dimmer
- Energy Star, CA Title 24 Ja8-2019, & ROHS compliant
- UL listed damp location
- 25 Watt (2273 delivered lm), 32 Watt (2977 delivered lm) Modules
- LED
- 5 Year Warranty



DIAGRAM:

*Drawings shown surface mounted



MOUNTING:

- Mount to standard 4" J-Box
- Cable mounting: 8ft adjustable 3 cable system, brushed nickel hardware finish



BUILD YOUR PRODUCT

Grayed areas are codes for creating your lighting catalog # EXAMPLE CATALOG # CDD-18-WL-25W-30-9-SPT

SHADE STYLE	SIZE		MATERIAL		ELECTRICAL		ССТ		CRI		MOUNTING	
	□ 18 □ 23	18" dia. 23" dia.	□WL	White Linen	□ 25W □ 32W	18" size, 2273 lm 23" size, 2977 lm	□ 30	3000K	□9	90 CRI	□ SPT (blank)	Brushed Nickel Pendant Surface



