



CATALOG #


SINGLE DRUM - SURFACE OR SUSPENDED (CSD)



*image shown surface mounted


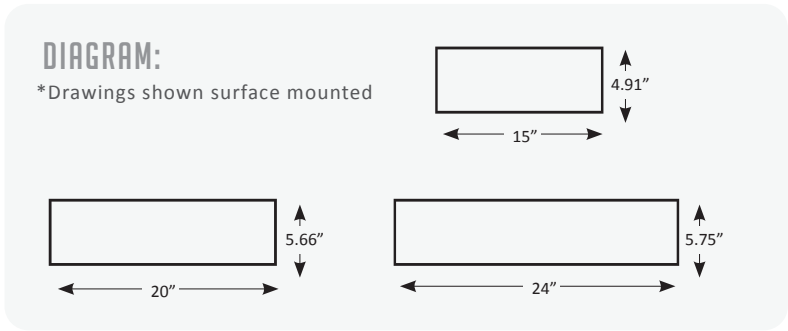
DIFFUSER:

- Outer drum fabric finish features 100% polyester fabric fused to acrylic. Washable with mild soap and water
- Diffuser created using UV stabilized, high transmission white acrylic



LIGHT ENGINE SPECIFICATIONS:

- Injection molded optics provide uniform luminous appearance
- >54,000 Hr. L70 life
- Integral driver, 120V, 60Hz, standard
- Dimmable to 10% via Triac dimmer
- Energy Star, CA Title 24 Ja8-2019, & ROHS compliant
- UL listed damp location
- LED
- 5 Year Warranty

MOUNTING:

- Mount to standard 4" J-Box
- Cable mounting: 8ft adjustable 3 cable system, brushed nickel hardware finish



BUILD YOUR PRODUCT

Grayed areas are codes for creating your lighting catalog #
EXAMPLE CATALOG # CSD-20-WL-32W-30-9

SHADE STYLE	SIZE	MATERIAL	ELECTRICAL	CCT	CRI	MOUNTING
<input type="checkbox"/> CSD	<input type="checkbox"/> 15 15" dia. <input type="checkbox"/> 20 20" dia. <input type="checkbox"/> 24 24" dia.	<input type="checkbox"/> WL White Linen	<input type="checkbox"/> 25W 15" size, 2273 lm <input type="checkbox"/> 32W 20" & 24" size, 2977 lm	<input type="checkbox"/> 30 3000K	<input type="checkbox"/> 9 90 CRI	<input type="checkbox"/> SPT Brushed Nickel Pendant <input type="checkbox"/> (blank) Surface

*** Specifications subject to change without notice.

