

LUNAR




CONSTRUCTION:

- Powder Coated (Black or White) Cast Aluminum with Polycarbonate Diffuser
- Enclosed and Gasketed



LIGHT ENGINE SPECIFICATIONS:

- LED
- ETL LISTED FOR WET LOCATIONS (IP65)
- Performance: 3000K, 80CRI, 120V, 22 WATTS, 1950 SOURCE LUMENS, >88 LPW
- Dimmable ELV
- 5 Year Warranty

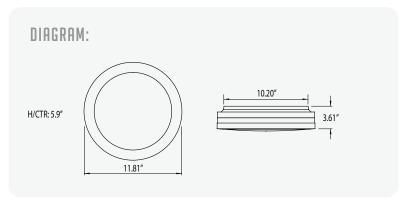

MOUNTING:

• Ceiling or Wall Mount

BUILD YOUR PRODUCT

Grayed areas are codes for creating your lighting catalog # EXAMPLE CATALOG # CLUN-12-W-22W-30-8

SHADE Style	SIZE		FINISH		ELECTRICAL		COLOR TEMP.		CRI	
□ CLUN	□ 12	12" Nominal	□B□W	Black White	□ 22W	22 WATTS	□30	3000K	□8	80 CRI





