

ACOUSTIC SILENCIO JAM BAR - LINEAR PENDANT



- FEATURES**
- 3000K, 3500K, 4000K **FIELD SELECTABLE
 - >80 CRI
 - 4FT - 30/40/50 watt 4350/5800/7250 lumens
 - 8FT - 60/80/100 watt 8700/11600/14500 lumens (based on 3500K)
 - Up to 147 LPW
 - Selectable wattage and Color temperature
 - Easy installation
 - Frosted diffuser for uniform light
 - Uplight - factory installed, selectable distribution for direct and indirect: 70/30, 50/50 or 100/0 distribution

CONSTRUCTION Extruded aluminum power supply, shade made from 1/2" thick PET Felt manufactured with 65% PET-Recycled Fiber and 35% PET Virgin Fiber, 100% recyclable, environmentally safe.

ELECTRICAL 120-277V input power supply.

LISTING ETL for US and Canada. Suitable for damp location. DLC

WARRANTY 5 Year Full Warranty

MOUNTING Suspended

SIZE 4FT | 8FT nominal

ADDITIONAL OPTIONS 8 Watt Emergency pack

DIMMING 0-10V Dimming to 10%

BUILD YOUR PRODUCT

Grayed areas are codes for creating your lighting catalog #
EXAMPLE CATALOG # **AJBILYT-4-PT/ILYT-D-4-W/ILYT-CCK-NF-144-W**

SHADE STYLE	SIZE	ACOUSTIC FINISH
<input type="checkbox"/> AJBILYT	<input type="checkbox"/> 4 4FT <input type="checkbox"/> 8 8FT <input type="checkbox"/> C Custom	<input type="checkbox"/> PT Pewter Grey <input type="checkbox"/> SL Slate Grey <input type="checkbox"/> C Custom

LIGHT SOURCE <small>**CCT AND WATTAGE FIELD SELECTABLE</small>	DISTRIBUTION	SIZE (NOMINAL)	FINISH	FACTORY INSTALLED EMERGENCY OPTION
<input type="checkbox"/> ILYT <input type="checkbox"/> BLANK (UNLIT)	<input type="checkbox"/> D Direct <input type="checkbox"/> DI Direct/Indirect	<input type="checkbox"/> 4 47.48" <input type="checkbox"/> 8 94.72"	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> S Silver	<input type="checkbox"/> EM-FAI yes <input type="checkbox"/> (blank) no

MOUNTING OPTIONS		FINISH
<input type="checkbox"/> ILYT-CCK-F-144	144" Adjustable Power Feed Cable Kit with 5" Slim Cover Plate	<input type="checkbox"/> W White
<input type="checkbox"/> ILYT-CCK-NF-144	144" Adjustable Non- Feed Cable Kit with 5" Slim Cover Plate	<input type="checkbox"/> B Black
<input type="checkbox"/> ILYT-CCK-EMF-144	240" Adjustable EM Feed Cable Kit with 5" Slim Cover Plate	<input type="checkbox"/> S Silver
<input type="checkbox"/> ILYT-CCK-EMF-240	240" Adjustable EM Feed Cable Kit with 5" Slim Cover Plate	
<input type="checkbox"/> ILYT-CCK-F-240	240" Adjustable Power Feed Cable Kit with 5" Slim Cover Plate	
<input type="checkbox"/> ILYT-CCK-NF-240	240" Adjustable Non-Feed Cable Kit With 5" Slim Cover Plate	
<input type="checkbox"/> CCK-HAB-144	144" Adjustable Cable Kit for Unlit Baffle	
<input type="checkbox"/> CCK-HAB-240	240" Adjustable Cable Kit for Unlit Baffle	

ACOUSTIC SILENCIO JAM BAR - LINEAR PENDANT



FEATURES

- 3000K, 3500K, 4000K **FIELD SELECTABLE
- >80 CRI
- 4FT - 30/40/50 watt 4350/5800/7250 lumens
- 8FT - 60/80/100 watt 8700/11600/14500 lumens (based on 3500K)
- Up to 147 LPW
- Selectable wattage and Color temperature
- Easy installation
- Frosted diffuser for uniform light
- Uplight - factory installed, selectable distribution for direct and indirect: 70/30, 50/50 or 100/0 distribution

CONSTRUCTION

Extruded aluminum power supply, shade made from 1/2" thick PET Felt manufactured with 65% PET-Recycled Fiber and 35% PET Virgin Fiber, 100% recyclable, environmentally safe.

ELECTRICAL

120-277V input power supply.

LISTING

ETL for US and Canada. Suitable for damp location. DLC

WARRANTY

5 Year Full Warranty

MOUNTING

Suspended

SIZE

4FT | 8FT nominal


ADDITIONAL OPTIONS

8 Watt Emergency pack

DIMMING

0-10V Dimming to 10%

ADDITIONAL SHADE DIMENSIONS

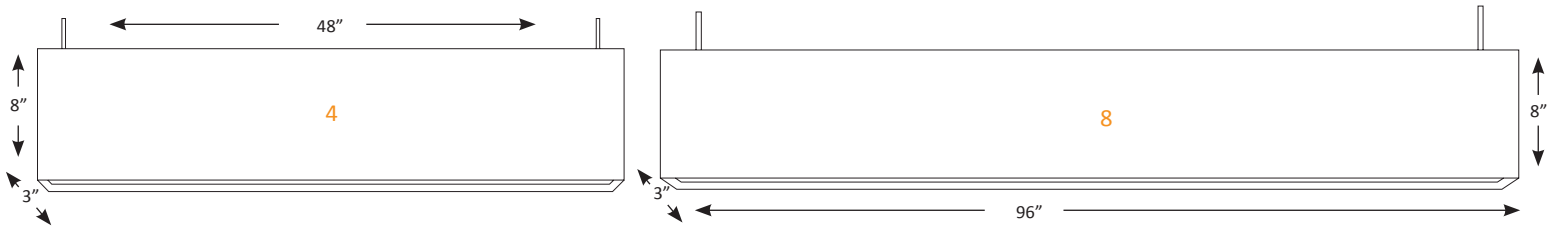

LINE DRAWINGS OF LIGHT SOURCE



4FT	47.48" x 2.75" x 3.15"
8FT	94.72" x 2.75" x 3.15"