



STANDARD LENS - SURFACE OR SUSPENDED

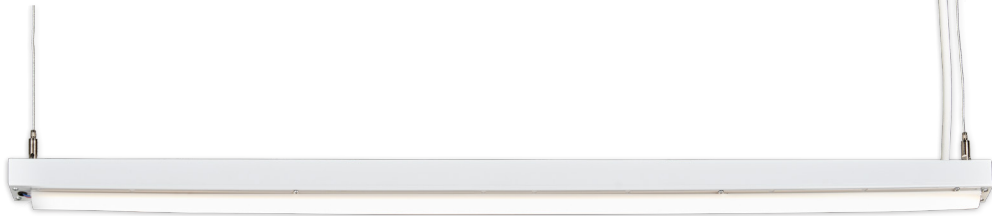

SUSPENDED



SURFACE

LED MODULE

- LED
- 3000K, 3500K, 4000K • >80 CRI
- LN2 Minimum of 3000 delivered lumens at 22 watts
- LN4 Minimum of 6500 delivered lumens at 46 watts

DRIVER OPTIONS

Programmable driver (dim to 0%)
*Consult factory for other wattages

CONSTRUCTION

- 20 GA Steel with Integral Driver
- Acrylic lens

ELECTRICAL

120-277V input power supply.

LISTING

UL for US and Canada. Suitable for damp location

WARRANTY

5 Year Full Warranty

MOUNTING

- Stem (24" stem 45 degree swivel)
- Cable (120" adjustable aircraft cable)
- Surface

BUILD YOUR PRODUCT


Grayed areas are codes for creating your lighting catalog #
EXAMPLE CATALOG # STD-LENS-2/LN2-30-8/SCK-LN-S

SHADE STYLE		SIZE	ELECTRICAL	COLOR TEMP.	CRI
<input type="checkbox"/> STD-LENS	<input type="checkbox"/> 2	2ft Linear Fixture	<input type="checkbox"/> LN2	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 >80
<input type="checkbox"/> STD-LENS	<input type="checkbox"/> 4	4ft Linear Fixture	<input type="checkbox"/> LN4	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 >80

MOUNTING		FINISH	OPTIONAL REMOTE EMERGENCY BACKUP (FIELD INSTALLED)
<input type="checkbox"/> SCK-LN	Stem Kit	<input type="checkbox"/> S Silver	<input type="checkbox"/> EM-ITA Yes
<input type="checkbox"/> CCK-LN-F/NF	Cable Kit (F=FEED NF=NON-FEED)	<input type="checkbox"/> B Black	<input type="checkbox"/> (blank) No
<input type="checkbox"/> (blank)	Surface	<input type="checkbox"/> W White	

*** Specifications subject to change without notice.

STANDARD LENS - SURFACE OR SUSPENDED

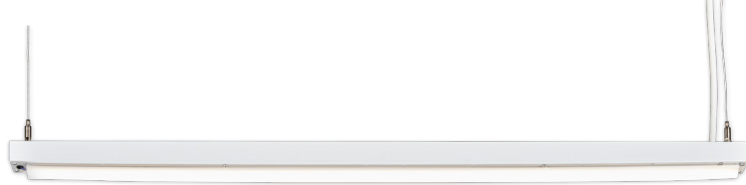

SUSPENDED



SURFACE

LED MODULE

- LED
- 3000K, 3500K, 4000K • >80 CRI
- LN2 Minimum of 3000 delivered lumens at 22 watts
- LN4 Minimum of 6500 delivered lumens at 46 watts

DRIVER OPTIONS

Programmable driver (dim to 0%)
*Consult factory for other wattages

CONSTRUCTION

- 20 GA Steel with Integral Driver
- Acrylic lens

ELECTRICAL

120-277V input power supply.

LISTING

UL for US and Canada. Suitable for damp location


WARRANTY

5 Year Full Warranty

MOUNTING


- Stem (24" stem 45 degree swivel)
- Cable (120" adjustable aircraft cable)
- Surface

ADDITIONAL SHADE DIMENSIONS

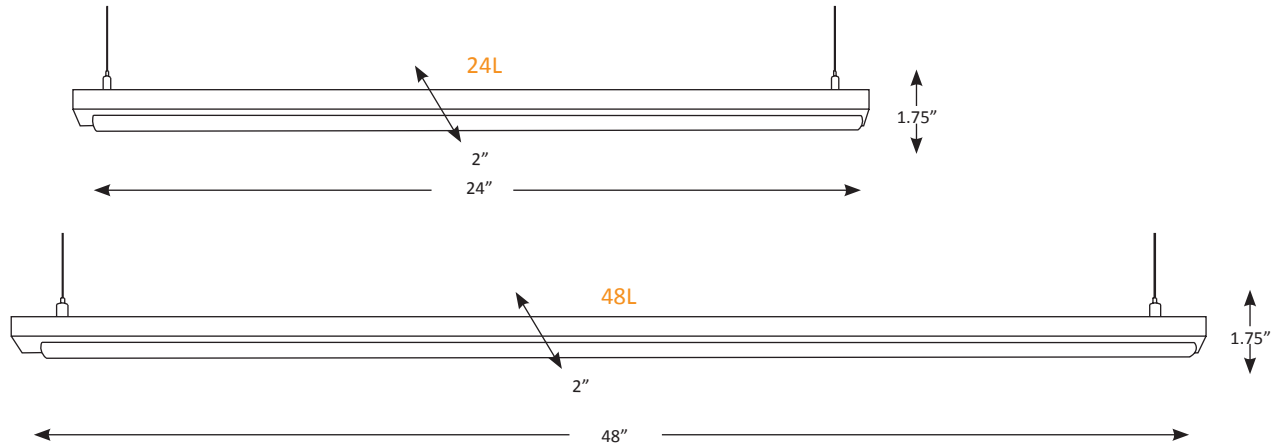


LINE DRAWINGS OF LIGHT SOURCE

2 FOOT FIXTURE

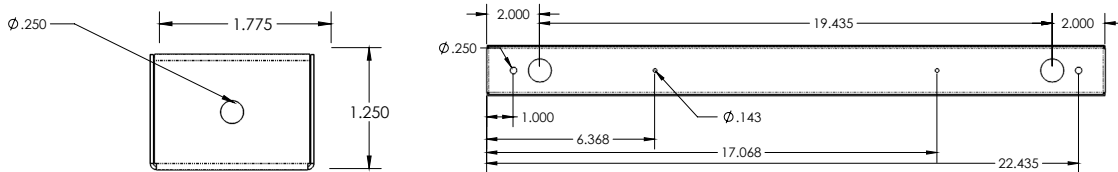

4 FOOT FIXTURE

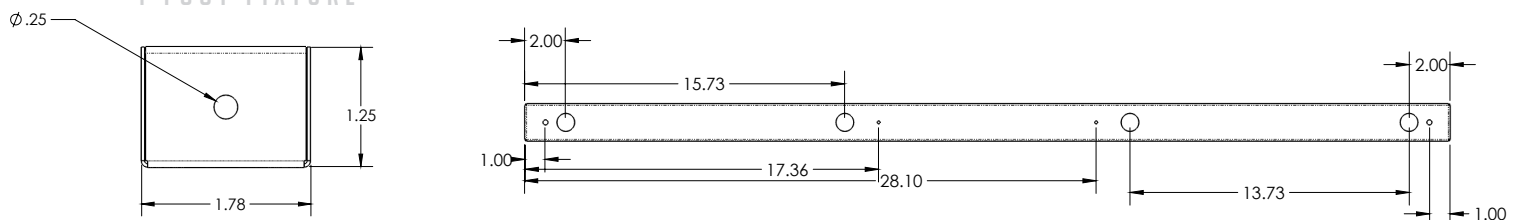

*** Specifications subject to change without notice.