


ACRYLIC CANOE - SURFACE OR PENDANT



SUSPENDED



SURFACE

LED MODULE

- LED
- 3000K, 3500K, 4000K • >80 CRI
- LN2 Minimum of 3000 delivered lumens at 22 watts
- LN4 Minimum of 6500 delivered lumens at 46 watts

DRIVER OPTIONS

Programmable driver (dim to 0%)  
\*Consult factory for other wattages

CONSTRUCTION

- 20 GA Steel with Integral Driver
- White high transmissive acrylic shade with accent color

ELECTRICAL

120-277V input power supply.

LISTING

UL for US and Canada. Suitable for damp location

WARRANTY

5 Year Full Warranty

MOUNTING

- Stem (24" stem 45 degree swivel)
- Cable (120" adjustable aircraft cable)
- Surface

BUILD YOUR PRODUCT

Grayed areas are codes for creating your lighting catalog #  
EXAMPLE CATALOG # BOT-24L-S/LN2-30-8/SCK-LN-S

SHADE STYLE	SIZE	ACCENT FINISH	ELECTRICAL	COLOR TEMP.	CRI
<input type="checkbox"/> BOT	<input type="checkbox"/> 24L	<input type="checkbox"/> WH White <input type="checkbox"/> S Silver <input type="checkbox"/> B Black <input type="checkbox"/> Z Bronze	<input type="checkbox"/> LN2	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 >80
<input type="checkbox"/> BOT	<input type="checkbox"/> 48L	<input type="checkbox"/> WH White <input type="checkbox"/> S Silver <input type="checkbox"/> B Black <input type="checkbox"/> Z Bronze	<input type="checkbox"/> LN4	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 >80

MOUNTING		FINISH	OPTIONAL REMOTE EMERGENCY BACKUP (FIELD INSTALLED)	
<input type="checkbox"/> SCK-LN	Stem Kit	<input type="checkbox"/> S Silver	<input type="checkbox"/> EM-ITA	Yes
<input type="checkbox"/> CCK-LN-F/NF	Cable Kit (F=FEED NF=NON-FEED)	<input type="checkbox"/> B Black	<input type="checkbox"/> (blank)	No
<input type="checkbox"/> (blank)	Surface	<input type="checkbox"/> W White		

\*\*\* Specifications subject to change without notice.

**ACRYLIC CANOE - SURFACE OR SUSPENDED**



SUSPENDED



SURFACE

**LED MODULE**

- LED
- 3000K, 3500K, 4000K • >80 CRI
- LN2 Minimum of 3000 delivered lumens at 22 watts
- LN4 Minimum of 6500 delivered lumens at 46 watts

**DRIVER OPTIONS**

Programmable driver (dim to 0%)  
\*Consult factory for other wattages

**CONSTRUCTION**

- 20 GA Steel with Integral Driver
- White high transmissive acrylic shade with accent color

**ELECTRICAL**

120-277V input power supply.

**LISTING**

UL for US and Canada. Suitable for damp location



**WARRANTY**

5 Year Full Warranty

**MOUNTING**



- Stem (24" stem 45 degree swivel)
- Cable (120" adjustable aircraft cable)
- Surface

**ADDITIONAL SHADE DIMENSIONS**

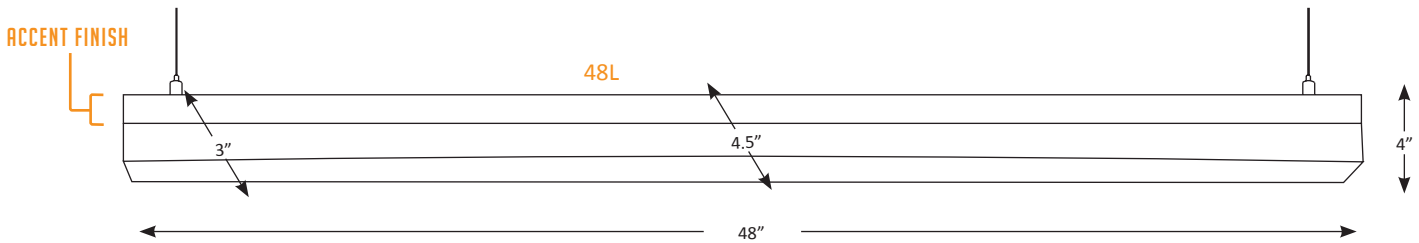
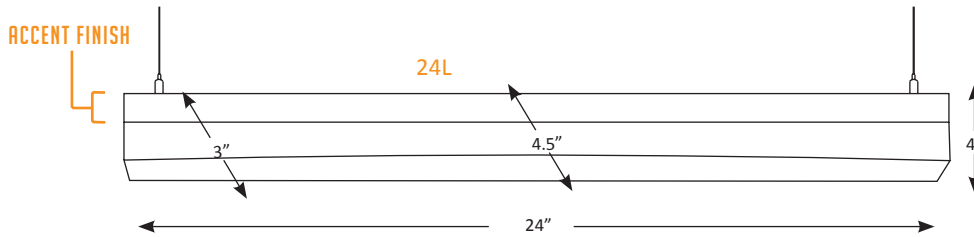


**LINE DRAWINGS OF LIGHT SOURCE**

**2 FOOT FIXTURE**

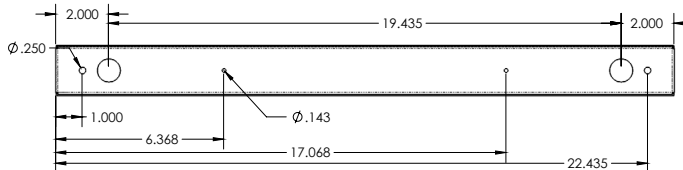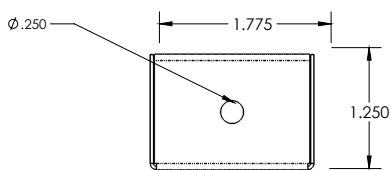

**4 FOOT FIXTURE**

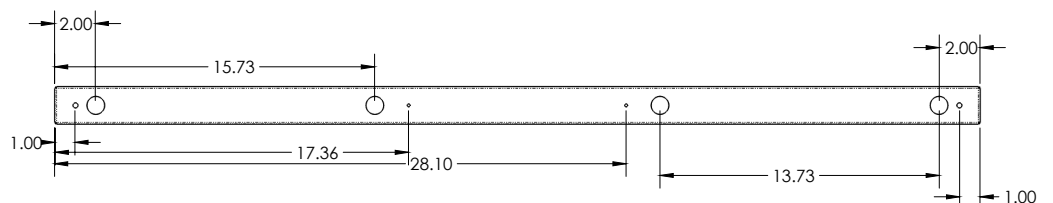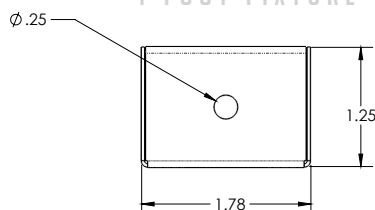

\*\*\* Specifications subject to change without notice.