


**ALUMINUM CYLINDER P46 PASSIVE PENDANT**

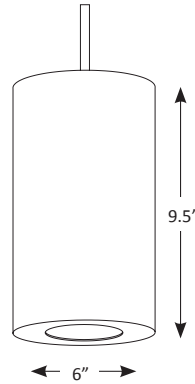

**LED MODULE** Samsung diode with a 3 step MacAdams ellipse

**THERMAL MANAGEMENT** The fixture is designed with a special passive heat sink to keep it running well below specifications. This ensures long life in excess of 50,000 hours.

**OPTICAL SYSTEM** 1.75" diameter aluminized reflectors are over 89% efficient and are interchangeable with a snap on connector.

**CONSTRUCTION** extruded aluminum heat sink, 10', 5 wire cord cuttable in the field

**ELECTRICAL** Integral LED driver. 0-10 V dimming is standard

**LISTING** UL for US and Canada, Suitable for listed damp location

**WARRANTY** 5 Year Full Warranty

**DIMMING** Dimming capabilities to dim down to 1% \*. 0-10V dimming

**VOLTAGE** 120~277V

**LUMEN OUTPUT** Provides 6,000 delivered lumens (50 watt), 3,000 delivered lumens (25 watt). Consult IES files for specific lumen values (available at [www.chameleonlyt.com](http://www.chameleonlyt.com))

**BUILD YOUR PRODUCT**

Grayed areas are codes for creating your lighting catalog #  
EXAMPLE CATALOG # SP-CYL-S-P46/P46-S-LED25-30-8-R20

STYLE	SHAPE	FINISH (SILVER CORD ONLY)	LIGHT SOURCE
<input type="checkbox"/> SP	<input type="checkbox"/> CYL Cylinder	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> S Silver	<input type="checkbox"/> P46 

LIGHT SOURCE	FINISH	WATTAGE (WATTS)	COLOR TEMP.	CRI	BEAM SPREAD
<input type="checkbox"/> P46	<input type="checkbox"/> S Silver	<input type="checkbox"/> LED25 25 Watts <input type="checkbox"/> LED50 50 Watts	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500	<input type="checkbox"/> 8 82	<input type="checkbox"/> R20 20 Degree <input type="checkbox"/> R30 30 Degree <input type="checkbox"/> R50 50 Degree

\*\*\* Specifications subject to change without notice.