


PARALIGHT

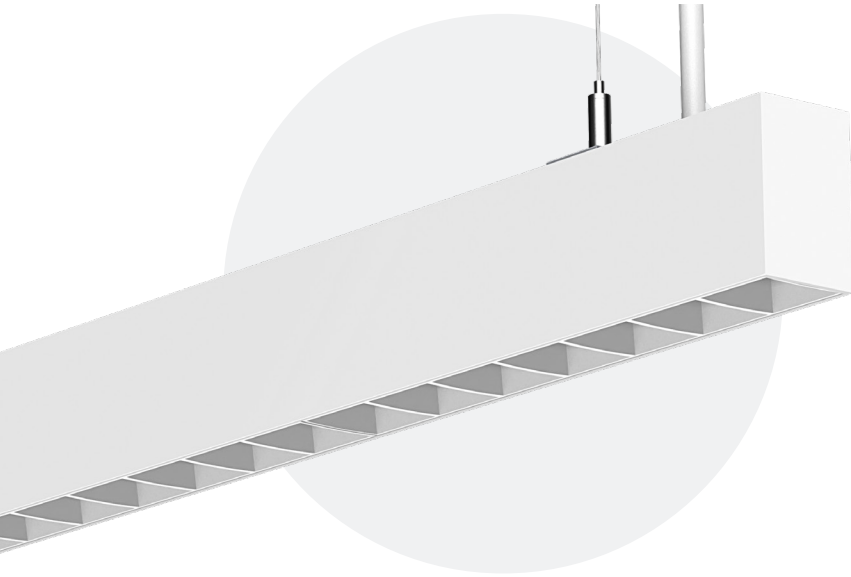

- LED MODULE**
- 3000K, 3500K, 4000K
 - 80 & 90 CRI
 - 4FT- 7,000 delivered lumens at approx. 55 watts
 - 30,40,50 direct only
 - 36,48,60 direct/indirect
 - 8FT- 14,000 delivered lumens at approx. 110 watts
 - 60,80,100 watts direct only
 - 60,80,120 direct/indirect

BEAM SPREADS 50 Degree, 80 Degree beam spreads

CONSTRUCTION Extruded aluminum with integral driver

ELECTRICAL 120-347V input power supply.

LISTING UL for US and Canada.
 Suitable for damp location
 DLC coming soon

WARRANTY 5 Year Full Warranty

MOUNTING Suspended

SIZE 4FT (nominal) | 8FT (nominal) 1.73" WIDE 2.8" TALL

- ADDITIONAL FEATURES**
- 90% efficacy, up to 160+ LPW
 - Extremely even vertical illumination: less than 3:1 Ratio
 - Total fixture size is 1.73" wide by 2.8" tall • Easy installation

DIMMING 0-10V Dimming to 1%




LINE DRAWINGS OF LIGHT SOURCE



BUILD YOUR PRODUCT ON NEXT PAGE

PARALIGHT

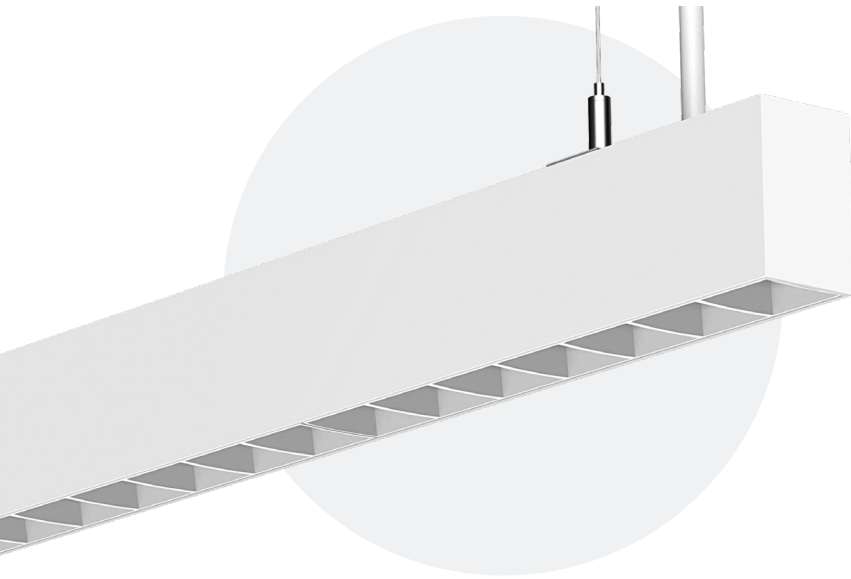

- LED MODULE**
- 3000K, 3500K, 4000K
 - 80 & 90 CRI
 - 4FT- 7,000 delivered lumens at approx. 55 watts
 - 30,40,50 direct only
 - 36,48,60 direct/indirect
 - 8FT- 14,000 delivered lumens at approx. 110 watts
 - 60,80,100 watts direct only
 - 60,80,120 direct/indirect

BEAM SPREADS 50 Degree, 80 Degree beam spreads

CONSTRUCTION Extruded aluminum with integral driver

ELECTRICAL 120-347V input power supply.

LISTING UL for US and Canada.
Suitable for damp location
DLC coming soon

WARRANTY 5 Year Full Warranty

MOUNTING Suspended

SIZE 4FT (nominal) | 8FT (nominal) 1.73" WIDE 2.8" TALL

- ADDITIONAL FEATURES**
- 90% efficacy, up to 160+ LPW
 - Extremely even vertical illumination: less than 3:1 Ratio
 - Total fixture size is 1.73" wide by 2.8" tall • Easy installation

DIMMING 0-10V Dimming to 1%

BUILD YOUR PRODUCT

Grayed areas are codes for creating your lighting catalog #
EXAMPLE CATALOG # **PAR-D-4-50-W-W**

LIGHT SOURCE <small>**CCT AND WATTAGE FIELD SELECTABLE</small>	DISTRIBUTION	SIZE (NOMINAL)	BEAM SPREAD	HOUSING FINISH	OPTIC FINISH	FACTORY INSTALLED EMERGENCY OPTION
<input type="checkbox"/> PAR	<input type="checkbox"/> D Direct <input type="checkbox"/> DI Direct/Indirect	<input type="checkbox"/> 4 45" <input type="checkbox"/> 8 90"	<input type="checkbox"/> 50 50° <input type="checkbox"/> 80 80°	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> S Silver	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> S Silver	<input type="checkbox"/> EM-FAI yes (blank) no

MOUNTING OPTIONS	FINISH
<input type="checkbox"/> PAR-CCK-F-144 144" Adjustable Power Feed Cable Kit with 5" Slim Cover Plate <input type="checkbox"/> PAR-CCK-NF-144 144" Adjustable Non- Feed Cable Kit with 5" Slim Cover Plate <input type="checkbox"/> PAR-CCK-EMF-144 240" Adjustable EM Feed Cable Kit with 5" Slim Cover Plate <input type="checkbox"/> PAR-CCK-EMF-240 240" Adjustable EM Feed Cable Kit with 5" Slim Cover Plate <input type="checkbox"/> PAR-CCK-F-240 240" Adjustable Power Feed Cable Kit with 5" Slim Cover Plate <input type="checkbox"/> PAR-CCK-NF-240 240" Adjusable Non-Feed Cable Kit With 5" Slim Cover Plate	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> S Silver

JOINING OPTIONS

<input type="checkbox"/> PAR-JNRBT	Joiner Bracket
<input type="checkbox"/> (blank)	none

**OPTIONAL EMERGENCY
BACKUP- FIELD INSTALLED**

<input type="checkbox"/> PAR-EMG-FDI	Field Installed
<input type="checkbox"/> (blank)	No

**FIELD INSTALLED UPLIGHT OPTION
CCT AND WATTAGE FIELD SELECTABLE

	SIZE	FINISH
<input type="checkbox"/> UPPAR Uplight	<input type="checkbox"/> 4 4FT	<input type="checkbox"/> W White
<input type="checkbox"/> (blank) none	<input type="checkbox"/> 8 8FT	<input type="checkbox"/> B Black
		<input type="checkbox"/> S Silver

