

**ACRYLIC CHICKLET 3D - SURFACE OR SUSPENDED**



SHOWN AS SUSPENDED

**LED MODULE**

- 3000K, 3500K, 4000K
- >90 CRI
- 3500K noted below. Consult factory for performance of all CCTs
- 34A - 34 Watt Nominal, min 2000 delivered lumens, 59 LPW, dimmable 120V TRIAC to 10%
- 20D - 24 Watt Nominal, min 2000 delivered lumens, 86 LPW, dimmable 0-10V to 1%
- 40D - 48 Watt Nominal, min 4000 delivered lumens, 86 LPW, dimmable 0-10V to 1%
- 62D - 75 Watt Nominal, min 6000 delivered lumens, 82 LPW, dimmable 0-10V to 1%

**SHADE** UV Stabilized, high transmission white acrylic

**CONSTRUCTION** 18 GA steel chassis

**ELECTRICAL** 120-277V input power supply.

**LISTING** UL for US and Canada. Suitable for damp location.

**WARRANTY** 5 Year Full Warranty

**MOUNTING**

- Surface
  - Cable (3 cable system, 50" adjustable)
  - Stem Mounting (25" stem, 45 degree swivel)
- \*\*\* Contact Factory for custom pendant lengths

\*\*ADDITIONAL SHADE DIMENSIONS CAN BE FOUND ON THE NEXT PAGE

**BUILD YOUR PRODUCT**

Grayed areas are codes for creating your lighting catalog #  
 EXAMPLE CATALOG # 3D-18-CH-WA/SV4-34A18-30-9/CCK-SV4-S


SHADE STYLE	SIZE	SHAPE	MATERIAL
<input type="checkbox"/> 3D	<input type="checkbox"/> 18	<input type="checkbox"/> CH Chicklet	<input type="checkbox"/> WA White Acrylic
<input type="checkbox"/> 3D	<input type="checkbox"/> 25	<input type="checkbox"/> CH Chicklet	<input type="checkbox"/> WA White Acrylic

ELECTRICAL	LIGHT OUTPUT	COLOR TEMP.	CRI
<input type="checkbox"/> SV4	<input type="checkbox"/> 34A18 2000LM Triac Dimming	<input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K	<input type="checkbox"/> 9 90
	<input type="checkbox"/> 20D18 2000LM 0-10V Dimming		
	<input type="checkbox"/> 40D18 4000LM 0-10V Dimming		
<input type="checkbox"/> SV4	<input type="checkbox"/> 34A24 2000LM Triac Dimming	<input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K	<input type="checkbox"/> 9 90
	<input type="checkbox"/> 40D24 4000LM 0-10V Dimming		
	<input type="checkbox"/> 62D24 6000LM 0-10V Dimming		

MOUNTING	FINISH
<input type="checkbox"/> CCK-SV4 Aircraft Cable	<input type="checkbox"/> S Silver
<input type="checkbox"/> SCK-SV4 Stem Mount	<input type="checkbox"/> B Black
<input type="checkbox"/> (blank) Surface Mount	<input type="checkbox"/> W White
	<input type="checkbox"/> C Custom

\*\*\* Specifications subject to change without notice.

**ACRYLIC CHICKLET 3D - SURFACE OR SUSPENDED**

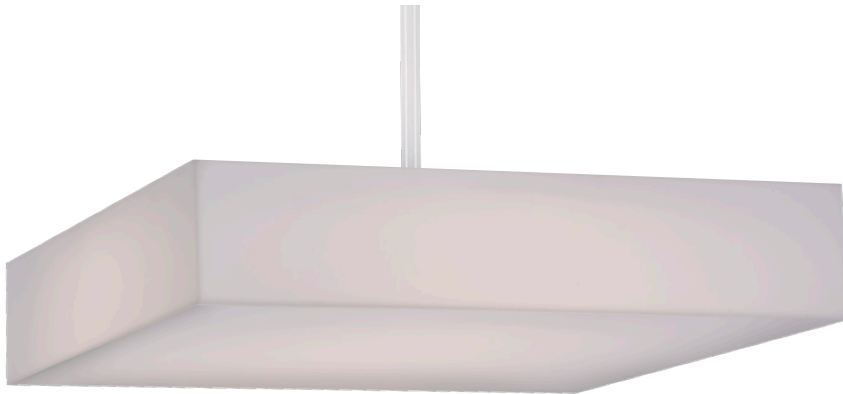

SHOWN AS SUSPENDED

**LED MODULE**

- 3000K, 3500K, 4000K
- >90 CRI
- 3500K noted below. Consult factory for performance of all CCTs
- 34A - 34 Watt Nominal, min 2000 delivered lumens, 59 LPW, dimmable 120V TRIAC to 10%
- 20D - 24 Watt Nominal, min 2000 delivered lumens, 86 LPW, dimmable 0-10V to 1%
- 40D - 48 Watt Nominal, min 4000 delivered lumens, 86 LPW, dimmable 0-10V to 1%
- 62D - 75 Watt Nominal, min 6000 delivered lumens, 82 LPW, dimmable 0-10V to 1%

**SHADE** UV Stabilized, high transmission white acrylic

**CONSTRUCTION** 18 GA steel chassis

**ELECTRICAL** 120-277V input power supply.

**LISTING** UL for US and Canada. Suitable for damp location.

**WARRANTY** 5 Year Full Warranty

**MOUNTING**

- Surface
  - Cable (3 cable system, 50" adjustable)
  - Stem Mounting (25" stem, 45 degree swivel)
- \*\*\* Contact Factory for custom pendant lengths

**ADDITIONAL SHADE DIMENSIONS**

DRAWINGS SHOWN AS SUSPENDED

