



# CHAMELEON LIGHTING



CATALOG NUMBER: \_\_\_\_\_

TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

## SHADOW BOX DRUM CLADDING KITS

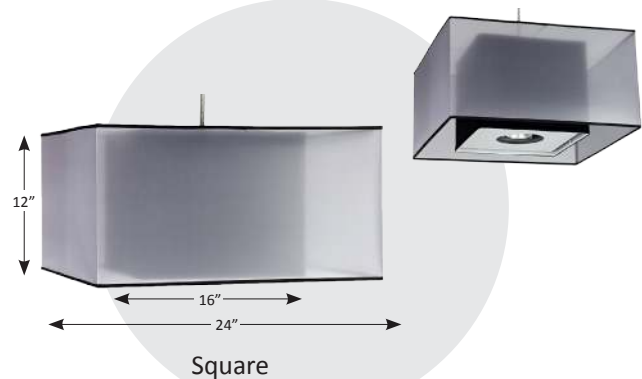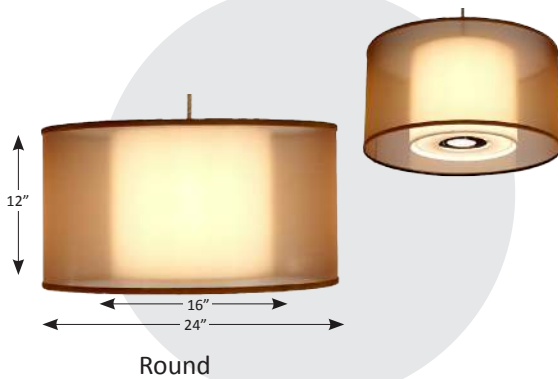

## PRODUCT SPECIFICATION

STYLE	SHAPE	INNER SHADE MATERIAL		OUTER SHADE MATERIAL		LIGHT ENGINE	
<input type="checkbox"/> SB	<input type="checkbox"/> R Round	<input type="checkbox"/> K Kraft		<input type="checkbox"/> SR Sheer Bronze		<input type="checkbox"/> P59	HIGH LUMEN DOWNLIGHT TO USE WITH IL-30-P59
	<input type="checkbox"/> S Square	<input type="checkbox"/> LW Linda White		<input type="checkbox"/> SW Sheer White		<input type="checkbox"/> PS	25 WATT MEDIUM BASE SOCKET
		<input type="checkbox"/> LN Linda Natural		<input type="checkbox"/> SB Sheer Black		<input type="checkbox"/> SV2-14	SURFACE FIXTURE WITH GLOW (14" ONLY)
		<input type="checkbox"/> LB Laura Beige		<input type="checkbox"/> SO Sheer Olive		**CHOOSE LIGHT ENGINE SPECIFICS ON NEXT PAGE	
		<input type="checkbox"/> RR Roja Red		<input type="checkbox"/> SP Sheer Platinum			
		<input type="checkbox"/> OD Olive Drab		<input type="checkbox"/> SI Sheer Ivory			
		<input type="checkbox"/> NB Natural Burlap					
		<input type="checkbox"/> CW Camelot Wheat					
		<input type="checkbox"/> CT Camelot Tusah					
		<input type="checkbox"/> KB Kona Brown					
		<input type="checkbox"/> KN Kona Navy					
		<input type="checkbox"/> MB Mystic Black					

Grayed areas are codes for creating your lighting specification

**Example Product Spec. - SB-R-LN-SW-P59**

## P59 LIGHT ENGINE



- Bridgelux COB, 3 step McAdams ellipse
- Up to 12,000 lumens delivered
- 2700K – 5000K
- \*82 CRI Standard (consult factory for other CRI)
- Special passive heat dissipation system made of extruded aluminum
- 50,000 hours minimum
- 5 Year warranty
- 20' of cord supplied
- ETL USA AND CA LISTED FOR DAMP LOCATION
- For full product details see P59 cut sheet


## PRODUCT SPECIFICATION

FAMILY	FINISH	MOUNTING	CORD COLOR	DRIVER	(WATTS)	COLOR TEMP.	CRI*	BEAM SPREAD
<input type="checkbox"/> P59	<input type="checkbox"/> S Silver	<input type="checkbox"/> Cord	<input type="checkbox"/> S Silver	<input type="checkbox"/> LED28	2800mA(114W) *consult factory for other wattages	<input type="checkbox"/> 27 2700 <input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 82 <input type="checkbox"/> 9 92	<input type="checkbox"/> R39 39 Degree <input type="checkbox"/> R64 64 Degree <input type="checkbox"/> R90 90 Degree

\* 92 CRI Only available in 2700K and 3000K

## DRIVER HOUSING

NAME	FINISH	NAME	FINISH
Surface Mount Driver Enclosure	SDE Silver White Black	Remote Driver Enclosure XL (fits IL-30 Driver)	RDE Gray
Surface Driver Plate	FDP Silver White Black	Remote Driver Enclosure	DE Silver

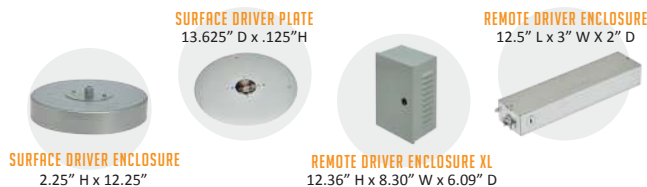

## PS SERIES



- Medium base socket rated for 25 watt LED max (lamp supplied by others)
- 120V
- 10' Cord supplied
- 5 Year warranty
- ETL USA AND CA LISTED FOR DAMP LOCATION
- For full product details see PS cut sheet

## PRODUCT SPECIFICATION

FAMILY	CORD LENGTH	FINISH COLOR
<input type="checkbox"/> PS	<input type="checkbox"/> 10 10FT	<input type="checkbox"/> S Silver <input type="checkbox"/> W White <input type="checkbox"/> B Black

## SV2 SERIES



- 14" Size
- 30 Watt 3000 Lumens
- TUNABLE WHITE LED 2200K – 6500K
- Constant light output for each color temperature
- 82 CRI Standard
- Wireless control of dimming (to 1%) and color temperature (100 degree increments)
- HMI REMOTE SOLD SEPERATELY, SEE SV2 INDIVIDUAL SPECIFICATION PAGE
- Timeclock function
- Programmable via Bluetooth APP to IOS or Android
- Fixed color available by selector switch\* (0-10v dimming)
- ETL USA AND CA LISTED FOR DAMP LOCATION
- 5 Year warranty
- See accessories page for other mounting options
- For full product details see SV2 cut sheet

## PRODUCT SPECIFICATION

FAMILY	COLOR TEMP.*	CRI
<input type="checkbox"/> SV2-14	<input type="checkbox"/> CT 2200K - 6500K <input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K	<input type="checkbox"/> 8 >80

\*HMI Wireless remote control accessory necessary for tunable fixtures



# CHAMELEON LIGHTING

CATALOG NUMBER: \_\_\_\_\_

TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## LED WRAP AROUND PANEL



24 watt 3000 lumen wrap-around panel with  
Dimmable 0 – 10V driver | 120 ~ 277V  
Includes 10' cable with 5 conductor wire

## PRODUCT SPECIFICATION

STYLE	COLOR TEMPERATURE	LIGHT ENGINE	CORD COLOR
<input type="checkbox"/> IL Illuminated Cylinder	<input type="checkbox"/> 30 3000K	<input type="checkbox"/> P59 HIGH LUMEN DOWNLIGHT **CHOOSE LIGHT ENGINE SPECIFICS ON NEXT PAGE	<input type="checkbox"/> S Silver <input type="checkbox"/> B Black <input type="checkbox"/> W White

Grayed areas are codes for creating your lighting specification

**Example Product Spec. - IL-30-P59-S**



# CHAMELEON LIGHTING

CATALOG NUMBER: \_\_\_\_\_

TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## SV2 SERIES MOUNTING ACCESSORIES



(Shown with 3D Cladding Kit)

### CABLE CONVERTER KIT FOR SV2 FIXTURES

- 3 CABLE, CABLE PUCK KIT
- 1/16" GALVANIZED CABLE WITH CAPTIVE PADDLE AND HALF BALL ENDS
- 50" ADJUSTABLE CABLES
- WHITE POWER CORD



(Shown with Contemporary Lens Cladding Kit)

### STEM CONVERTER KIT FOR SV2 FIXTURES

- 45 DEGREE SWIVEL
- 1/2" WIDTH
- 24" LENGTH
- CONSULT FACTORY FOR OTHER LENGTHS

## PRODUCT SPECIFICATION

STYLE	SIZE	FINISH
<input type="checkbox"/> SCK <input type="checkbox"/> CCK	<input type="checkbox"/> SV2 For SV2 Fixtures	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> S Silver

**\*\*CCK ONLY AVAILABLE IN SILVER**

Grayed areas are codes for creating your lighting specification

**Example Product Spec. - SCK-SV2-W**

10 Strecker Rd. / Ellisville, MO 63011 / Ph. (888) 896-2101 / Fax (888) 896-2101 / [info@chameleonltg.com](mailto:info@chameleonltg.com)

[WWW.CHAMELEONLTG.COM](http://WWW.CHAMELEONLTG.COM)

Specifications subject to change without notice.

**MADE  
IN THE USA**